


cAP 2n



24V 0.38A Adapter

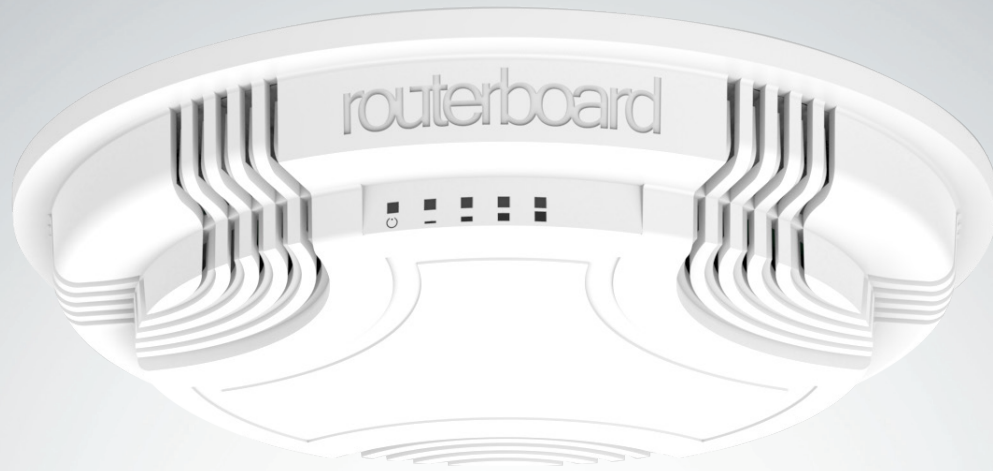

Ceiling mount base



Ceiling mount attachment



PoE injector

The cAP is our first 2.4GHz ceiling AP. Inconspicuously designed, it blends into the environment, perfect for hospitality businesses, such as hotels, airports, shopping malls etc.

The cAP 2n supports 802.11b/g/n and can be powered by PoE. It's a perfect companion for the MikroTik CAPsMAN (controlled AP system manager), allowing you to control all your AP devices from one central location.

Unlike traditional controller software, which requires a separate PC/Mac to run, our CAPsMAN runs on any existing RouterBOARD device in your network. No need for a separate controller machine.

Everything is included to get you started, wall/ceiling mount, PoE injector, power adapter and even the screws and screw anchors.

CPU	Atheros AR9331-AL1A 400MHz network processor
Memory	64MB DDR RAM
Ethernet	One 10/100 Mbit/s Fast Ethernet port with Auto-MDI/X
Wireless	Wireless Built-in 2.4 GHz 802.11b/g/n, one chain
Wireless regulations	Specific frequency range may be limited by country regulations
Extras	Reset switch
LEDs	5x LEDs, 1x user LED
Power options	Passive PoE input 12-56V
Consumption	2W
Dimensions	∅ 185mm, height: 31mm
Operating temperature	-30C to +70C
Operating system	WISP AP (level 4) license
Package contains	24V 0.38A power adapter, PoE injector, ceiling mount base, ceiling mount attachment
Antenna	Max gain 2dBi

802.11b/g	RX Sensitivity	TX Power
1Mbit	-96	17dBm
11Mbit	-88	17dBm
6Mbit	-92	15dBm
54Mbit	-73	11dBm
802.11n	RX Sensitivity	TX power
MCS0	-92	15dBm
MCS7	-70	10dBm